

# Accura® Materials for SLA Printing on ProX® 800 & 950

Plastic and composite parts made from Accura SLA materials are the industry's gold standard for accuracy, providing excellent resolution, surface finish and dimensional tolerances. Accura SLA materials offer the broadest choice of materials in 3D printing and can easily be optimized for specific prototyping, casting, tooling and direct manufacturing applications.



Various Accura materials for form and fit tests of a dashboard



Accura Xtreme



Accura CastPro

Materials for ProX SLA Printers <sup>1</sup>	Viscosity (cps) (@ 30 °C)	Flexural Modulus (MPa) ASTM D 790	Flexural Strength (MPa) ASTM D 790	Tensile Modulus (MPa) ASTM D 638	Tensile Strength (MPa) ASTM D 638	Elongation at Break ASTM D 638	Impact Strength (J/m) ASTM D 256	Heat Deflection Temp (°C) ASTM D 648
<b>Polypropylene-Like Class</b>								
Accura 25	250	1380-1660	55-58	1590-1660	38	13-20 %	19-24	@ 66 PSI - 58-63 @ 264 PSI - 51-55
Accura PP White (SL 7811)	210	1960-2060	64-66	2030-2230	40-42	7-13 %	42-59	@ 66 PSI - 47
<b>Tough/Durable Class</b>								
Accura Xtreme	250-300	1520-2070	52-71	1790-1980	33-44	14-22 %	35-52	@ 66 PSI - 62 @ 264 PSI - 54
Accura Xtreme White 200	650-750	2350-2550	75-79	2300-2630	45-50	7-20 %	55-66	@ 66 PSI - 47 @ 264 PSI - 42
<b>ABS-Like Class</b>								
Accura 55	155-185	2690-3240	88-110	3200-3380	63-68	5-8 %	12-22	@ 66 PSI - 55-58 @ 264 PSI - 51-53
Accura ABS White (SL 7810)	210	2040-2120	74-76	2290-2400	46-48	8-14 %	24-47	@ 66 PSI - 51
Accura ABS Black (SL 7820)	210	2260-2370	75-78	1890-2440	45-47	6-13 %	39-56	@ 66 PSI - 51
<b>Clear Class</b>								
Accura ClearVue Free (SL 7870)	180	1940-2250	73-76	1920-2010	38-42	10-22 %	23-51	@ 66 PSI - 48 @ 264 PSI - 41
Accura ClearVue <sup>2</sup>	235-260	1980-2310	72-84	2270-2640	46-53	3-15 %	40-58	@ 66 PSI - 51 @ 264 PSI - 50
Accura 60	150-180	2700-3000	87-101	2690-3100	58-68	5-13 %	15-25	@ 66 PSI - 53-55 @ 264 PSI - 48-50
<b>Casting Class</b>								
Accura CastPro	240-260	2310-2340	82-84	2490-2620	52-53	4.1-8.3 %	43-49.5	@ 66 PSI - 51 @ 264 PSI - 50
Accura CastPro Free (SL 7800)	205	2200-2480	81-83	1940-2350	45-48	9-19 %	35-50	@ 66 PSI - 62
<b>High Temp &amp; Composite Class</b>								
Accura Phoenix	120-130	2140-2330	96-100	2340-2640	45-61	3-5 %	13-19	@ 66 PSI - 83 @ 264 PSI - 64
Accura 48 HTR	200-250	2760-3400	105-118	2800-3980	64-67	4-7 %	22-29	@ 66 PSI - 130 @ 264 PSI - 110
Accura SL 5530	210-270	2620-3240	63-87	2889-3144	57-61	3.8-4.4 %	21	@ 66 PSI - 70-85 @ 264 PSI - 55-58
Accura PEAK	605	4180-4790	77-126	4220-4790	57-78	1.3-2.5 %	21.3-27.3	@ 66 PSI - 153 @ 264 PSI - 124
Accura HPC	700-1000	8700-10200	137-157	9000-9700	66-89	0.8-1.9 %	14-17	@ 66 PSI - TBD @ 264 PSI - TBD
Accura CeraMAX	1500-2000	8270-8370	137-145	9460-9680	78-87	1.0-1.5 %	14.5-17.9	@ 66 PSI - 220 @ 264 PSI - 97
Accura Bluestone	1200-1800	8300-9800	124-154	7600-11700	66-68	1.4-2.4 %	13-17	@ 66 PSI - 267-284
<b>Dental Class</b>								
Accura e-Stone™	200-300	1350-1750	54-59	1500-1750	37-39	10-23 %	18-25	@ 66 PSI - 58-63 @ 264 PSI - 51-55
<b>Medical Class</b>								
Accura ClearVue <sup>2</sup>	235-260	1980-2310	72-84	2270-2640	46-53	3-15 %	40-58	@ 66 PSI - 51 @ 264 PSI - 50

<sup>1</sup> Not all materials will build in all build modes and on every printer model. Check with your local sales representative to verify that the combination you need is available.

<sup>2</sup> USP Class VI capable

# Visijet® Materials for SLA Printing on ProJet® 6000 & 7000

The wide range of Visijet SL engineered materials offers the toughest and the highest quality parts to meet a broad range of commercial and production applications.



Visijet SL Black




Visijet SL Jewel



Visijet SL Tough (frame) and Visijet SL Clear (lenses)



Visijet e-Stone

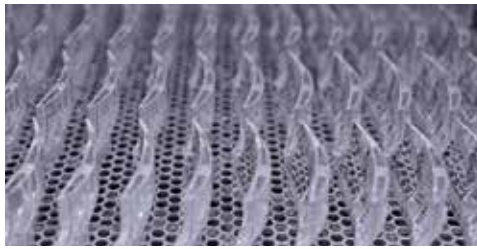

Visijet SL Clear



Visijet SL Impact

Materials for ProJet 6000/7000 Printers <sup>1</sup>	Viscosity (cps) (@ 30 °C)	Flexural Modulus (MPa) ASTM D 790	Flexural Strength (MPa) ASTM D 790	Tensile Modulus (MPa) ASTM D 638	Tensile Strength (MPa) ASTM D 638	Elongation at Break ASTM D 638	Impact Strength (J/m) ASTM D 256	Heat Deflection Temp (°C) ASTM D 648
<b>Polypropylene-Like Class</b>								@ 1.82 MPa
Visijet SL Flex	180-280	1420	57	1620	38	16%	22	53 °C
<b>Tough/Durable Class</b>								
Visijet SL Tough	180-250	1850	62	1890	41	18%	44	54 °C
Visijet SL Impact	680-780	2390	74	2626	48	14%	65	42 °C
<b>ABS-Like Class</b>								
Visijet SL Black	180-260	2350	76	2150	45	5%	47	51 °C
<b>Clear/Castable Class</b>								
Visijet SL Clear <sup>2</sup>	200-300	2330	83	2560	52	6%	46	50 °C
<b>High Temp Class</b>								
Accura Phoenix	120-130	2470	103	2660	65	7 %	24	@ .45 MPa - 72/129 @ 1.82 MPa - 65/104
<b>Jewelry &amp; Dental Class</b>								
Visijet SL Jewel	130 - 200	1824	61	1910	40	12%	45	32 °C
Visijet e-Stone™	170-270	1550	57	1630	38	17%	22	53 °C
<b>Medical Class</b>								
Visijet SL Clear <sup>2</sup>	200-300	2330	83	2560	52	6%	46	50 °C

<sup>1</sup> Not all materials will build in all build modes and on every printer model. Check with your local sales representative to verify that the combination you need is available.

<sup>2</sup> USP Class VI capable



**middle east**  
3D PRINTING THE FUTURE

**3D SYSTEMS**  
DISTRIBUTOR | Middle East & North Africa

U.A.E Office : 3204, Prism Tower, Business Bay, P.O. Box 28820, Dubai, U.A.E.  
K.S.A Office : Al Saif Tower, 6th Floor, King Abdullah Street, Near Intersection with Olaya Street, Riyadh, K.S.A.  
Tel : +971.4.443.3853 ; Fax : +971.4.443.3938 ; Email : info@3d-me.com ; Website: www.3d-me.com